

SILVER FILLER EFFECT



Helios TBLUS, d.o.o. Količevo 65, 1230 Domžale, Slovenia T +386 1 722 40 00 E wood.coatings@helios.si www.helios-woodcoatings.com













For the SILVER FILLER EFFECT, we selected a table made of solid oak wood. The most suitable is cracked and gnarly wood, which we also call wild oak. ••••••

Sand the surface using granulation P 180.




Prepare the silver filler and apply it to the surface, where you want the SILVER FILLER EFFECT.

> Using a spatula, apply the filler mostly to cracks, because this is where the effect will be the most visible.

In the final step, lacquer the surface using transparent lacquer. The most natural look can be achieved by using deep matt acrylic lacquer.

Suitable for usage after 24 hours.

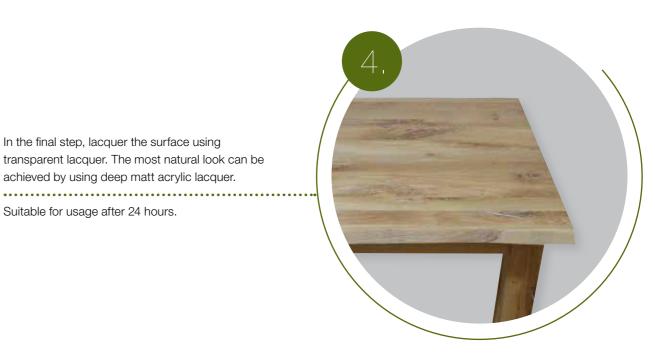

BEFORE



AFTER

