

Publisher: Helios TBLUS, d.o.o. Ver. 002 EN Images used under license from Shutterstock.com.



SOFT TOUCH EFFECT



Helios TBLUS, d.o.o.
Količevo 65, 1230 Domžale, Slovenia
T +386 1 722 40 00
E wood.coatings@helios.si
www.helios-woodcoatings.com

Member of  **HELIOS** Part of  **KANSAI PAINT**

 Visit our YouTube channel!
Helios Industrial Product Solutions



The **SOFT TOUCH EFFECT** is achieved by using a special lacquer, which makes the finished product soft to touch. In our case we prepared this effect on a child's chair, however, this effect can be used on other furniture pieces.



3.



When the surface is completely dry, we apply Soft touch lacquer. This lacquer is matt and is not suitable for exterior use. Application with air spraying.

We recommend drying at high temperature to get better results.


1.



The wooden surface is prepared by sanding using P180 – P220 sanding paper.


Then follows lacquering with Heliodur base enamel. Normally, air spraying is needed in two coats. In-between coats we sand using granulation paper P280-320.

2.



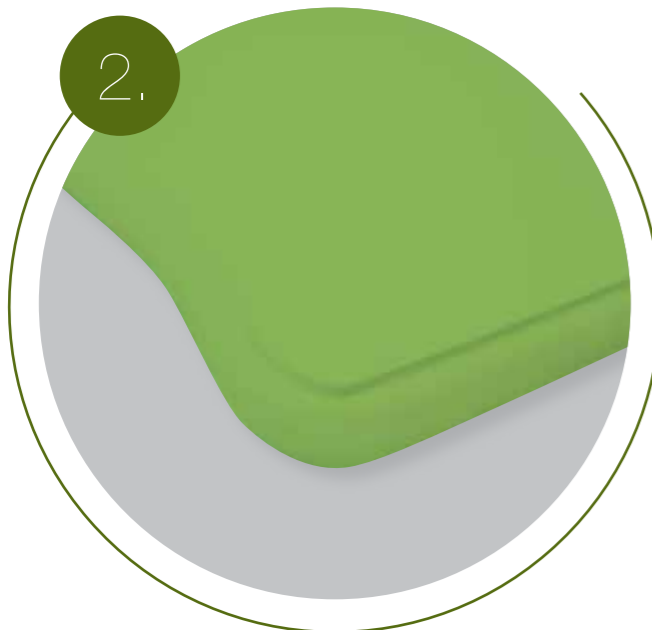


Then we apply Heliodur enamel in the selected colour. Dry at room temperature (18-23°C) 4-6 hours.

4.

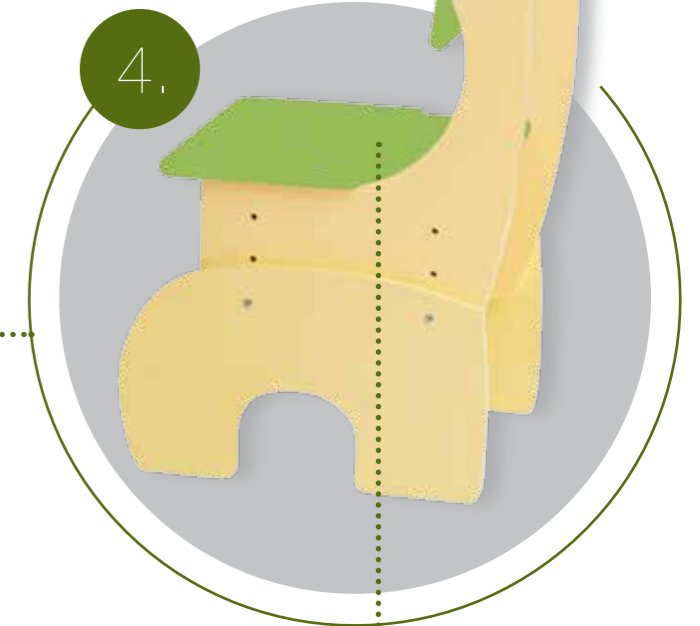

The final effect is soft to touch and matt, as well as anti-fingerprint.

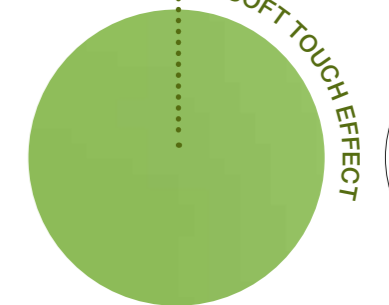

Effects of different colour shades can be prepared according to different colour cards (RAL, Monicolor, NCS etc.)