



RUST EFFECT

RUST EFFECT is an extremely interesting effect on wood that gives the element or space, where it is placed, a special antique feel.



1.

For making the rust effect we need HIDROHEL paste iron or copper. The best result is achieved by mixing the two pastes in a desired ratio. The paste needs to be mixed prior to use because of the sediment.



2.



In step 2 the prepared paste mixture is diluted in a prescribed ratio.

3.



Then follows air spraying in application of $75 - 110 \text{ g/m}^2$. Let it dry for 2-3 hours.

Sanding is not needed.

4.



In the following step we apply HIDROHEL ACTIVATOR O and activate the oxidation. When spraying vertically, apply a smaller amount of activator so that it doesn't drip from the surface.


Let it dry for 24 hours.

5.



The process of making the effect is finished by spraying transparent lacquer over the surface.

The product is ready for use after 8 hours.

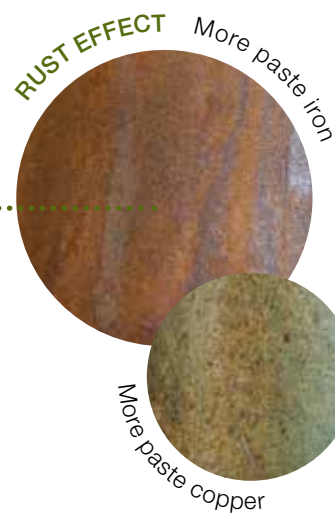



Helios TBLUS, d.o.o.

Količevo 65, 1230 Domžale, Slovenia

T +386 1 722 40 00

E wood.coatings@helios.si

www.helios-woodcoatings.com



Visit our YouTube channel!

KANSAI HELIOS Industrial Coating Solutions

Member of



Part of

